

Endian UTM Mini 25 WiFi

The new generation of UTM hardware appliances




Endian's Mini Wi-Fi perfectly integrates into your network infrastructure and allows you to get rid of your old access point.

By supporting the 802.11 a/b/g/n standards both 2.4 or 5 GHz connections are possible. You can define up to four different Wi-Fi zones that can be configured independently. But not only this - thanks to the tight integration into Endian's operating system your Hotspot users can be authenticated directly when connecting to the WPA/WPA2 Enterprise-secured wireless network.

Highlights

- ✔ Complete Hotspot Integration
- ✔ Up to 4 Configurable WiFi Networks
- ✔ WPA & WPA2 Personal/Enterprise Authentication
- ✔ Standards 802.11 a/b/g/n
- ✔ Support for 2.4 or 5 GHz
- ✔ 2x2 MIMO Antennas

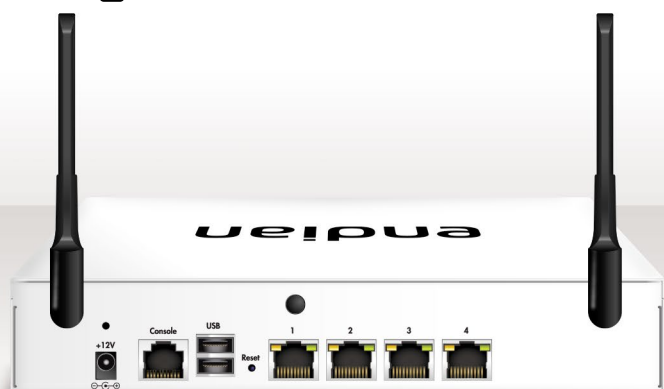

Performance*	Mini 25 WiFi
Firewall Throughput	1,5 Gbit/s
VPN Throughput (IPsec & SSL)	120 Mbit/s
IPS Throughput	150 Mbit/s
Antivirus Throughput (Proxy)	175 Mbit/s
Web Security Throughput	400 Mbit/s
Concurrent Sessions	300,000
Max Concurrent Hotspot Connections	30

Hardware	Mini 25 WiFi
Case	Desktop
Dimensions	44mm x 232mm x 153mm
Weight	1.1 kg
Memory	2 GB
Storage	16 GB
Networking	4x Gigabit Ethernet
LAN Bypass	-
Power Supply	40W External
Cooling	Fan
LCD Display	-
VGA	-
Hardware Warranty	included in maintenance
Certifications	FCC/CE/RoHS

*Maximum throughput measured under ideal test conditions and using multiple flows through multiple ports. Actual performance may vary depending on network conditions and activated services.

Endian UTM Features

Network Security

- Stateful packet firewall
- Application control (including Facebook, Twitter, Skype, WhatsApp and more)
- Demilitarized zone (DMZ)
- Intrusion detection and prevention
- Multiple public IP addresses
- Multiple WAN
- Quality of service and bandwidth management
- SNMP support
- VoIP/SIP support
- SYN/ICMP flood protection
- VLAN support (IEEE 802.1Q trunking)
- DNS proxy/routing
- Anti-spyware
- Phishing protection

Web Security

- HTTP & FTP proxies
- HTTPS filtering
- Transparent proxy support
- URL blacklist
- Authentication: Local, RADIUS, LDAP, Active Directory
- NTLM single sign-on
- Group-based and user-based web content filter
- Time based access control with multiple time intervals
- Bitdefender Anti-malware Engine
- Bitdefender Content filter Engine
- SafeSearch enforcement

Mail Security

- SMTP & POP3 proxies
- Anti-spam with bayes, pattern and SPF
- Heuristics, black- and whitelists support
- Anti-virus
- Transparent proxy support
- Email quarantine management
- Spam auto-learning
- Transparent mail forwarding (BCC)
- Greylisting
- Bitdefender Anti-spam Engine
- Bitdefender Anti-malware Engine

WAN Failover

- Automatic WAN uplink failover
- Monitoring of WAN uplinks
- Uplink types: Ethernet (static/DHCP), PPPoE, PPTP
- Support for UMTS/GPRS/3G USB dongles

User Authentication

- Active Directory / NTLM
- LDAP
- RADIUS
- Local

Virtual Private Networking

IPsec

- Encryption: Null, 3DES, CAST-128, AES 128/192/256-bit,
 - Blowfish 128/192/256-bit,
 - Twofish 128/192/256-bit,
 - Serpent 128/192/256-bit,
 - Camellia 128/192/256-bit
- Hash algorithms: MD5, SHA1, SHA2 256/384/512-bit, AESXCBC
- Diffie Hellman modes: 1, 2, 5, 14, 15, 16, 17, 18, 22, 23, 24
- Authentication: pre-shared key (PSK), RSA keys
- X.509 certificates
- IKEv1, IKEv2
- Dead Peer Detection (DPD)
- NAT traversal
- Compression
- Perfect Forward Secrecy (PFS)
- VPN Site-to-Site
- VPN Client-to-Site (roadwarrior)
- L2TP user authentication
- XAUTH user authentication

OpenVPN

- Encryption: DES, 3DES, AES 128/192/256-bit, CAST5, Blowfish
- Authentication: pre-shared key, X.509 certificates
- Support for VPN over HTTP Proxy
- PPTP passthrough
- VPN client-to-site (roadwarrior)
- VPN client for Microsoft Windows and Apple OS X
- Possibility of multiple logins per user
- VPN failover
- Multiple server support
- Support for mobile devices (Android, iOS)

VPN Portal for Clientless Connections*

- Web-based access to internal resources
- Configurable portal page
- Support for multiple destinations
- Destination-based authentication
- SSL offloading

User Management & Authentication

- Unified user management for OpenVPN, L2TP, XAUTH, VPN Portal
- Group management
- Integrated certificate authority
- External certificate authority support
- User password and certificate management
- Multiple authentication servers (Local, LDAP, Active Directory, RADIUS)
- Fully integrated one-time password (OTP) support
- Let's Encrypt Support

BYOD / Hotspot**

- Configurable captive portal
 - Use your website as portal (SurfNow Button)
 - Free access to allowed sites (walled garden)
 - Wired / wireless support
 - Integrated RADIUS service
 - Connection logging
 - Bandwidth limiting based on user, ticket or global settings
 - Social login (Facebook, Google)
 - Social Enabler (sharing on social networks)
 - MAC-address based user accounts
 - Configurable multiple logins per user
 - User accounts import/export via CSV
 - User password recovery
 - Automatic client network configuration (support for DHCP and static IP)
 - Fully integrated accounting
 - Generic JSON API for external accounting and third party integration
 - Instant WLAN ticket shop (Smart-Connect)
 - Single-click ticket generation (Quick ticket)
 - SMS/e-mail user validation and ticketing
 - Pre-/postpaid and free tickets
 - Time-/traffic-based tickets
 - Configurable ticket validity
 - Terms of Service confirmation
 - MAC address tracking for free hotspots
 - Cyclic/recurring tickets (daily, weekly, monthly, yearly)
 - Remember user after first authentication (SmartLogin)
 - Multi-location setup through master/satellite configuration***
 - External authentication server (Local, LDAP, Active Directory, RADIUS)
- ## Network Address Translation
- Destination NAT
 - Incoming routed traffic
 - One-to-one NAT
 - Source NAT (SNAT)
 - IPsec NAT traversal
- ## Routing
- Static routes
 - Source-based routing
 - Destination-based routing
 - Policy-based routing (based on interface, MAC address, protocol or port)

Bridging

- Firewall stealth mode
- OSI layer 2 firewall functionality
- Spanning tree
- Unlimited interfaces per bridge

High Availability

- Hot standby (active/passive)
- Node data/configuration synchronization (not for BYOD/Hotspot)

Event Management

- More Than 30 Individually Configurable Events
- Email Notifications
- SMS Notifications
- Powerful Python Scripting Engine

Logging and Reporting

- Reporting dashboard
- Detailed system, web, email, attack and virus reports
- Live network traffic monitoring (powered by ntopng)
- Live log viewer
- Detailed user-based web access report (not in Mini 10 and Mini 10 WiFi)
- Network/system/performance statistics
- Rule-based logging settings (firewall rules)
- Syslog: local or remote
- OpenTSA trusted timestamping

Extra Services

- NTP (Network Time Protocol)
- DHCP server
- SNMP server
- Dynamic DNS

Management / GUI

- Centralized management through Endian Network (SSL)
- Easy Web-Based Administration (SSL)
- Multi-language web-interface (English, Italian, German, Japanese, Spanish, Portuguese, Chinese, Russian, Turkish)
- Secure remote SSH/SCP access
- Serial console

Updates and Backups

- Centralized updates through Endian Network
- Scheduled automatic backups
- Encrypted backups via email
- Instant recovery / Backup to USB stick (Endian Recovery Key)